


---

## WORKSHOP 2

---

# *Linear Static Analysis of a Simply-Supported Truss*

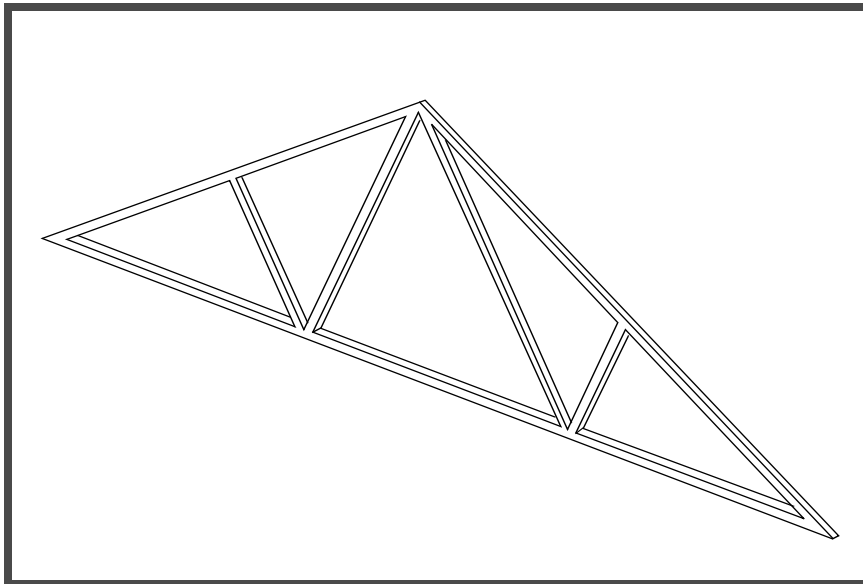

### **Objectives:**

- Define a set of material properties using the beam library.
- Perform a static analysis of a truss under 3 separate loading conditions.
- Review results.




### Model Description:

Below is a finite element representation of the truss structure shown on page 2-1. The nodal coordinates provided are defined in the Global Cartesian Coordinate System (MSC.Nastran Basic system).


The roof frame shown in the attached figure consists of eleven wood and steel members. The wood members, have uniform cross section properties and act only as tension and compression members (See page 2-5 for location). The steel members, are bars that are capable of withstanding tension, compression, shear, and loads in the plane of the frame (See page 2-5 for location). The section properties for the steel members are supplied as problem data. All the steel members are welded end to end, however, the wood members are pinned end to end. The frame is supported by pinned connections in the horizontal and vertical directions at Grid Point 1 and in the vertical direction at Grid Point 7. In addition, all Grid Points have fixed out of plane translations and have constrained out of plane rotations.

**HINT:** DOF 345 for grid 1 through 7 can be constrained by using the permanent single point constraint option in the GRID entry.

**Figure 2.1** - Grid Coordinates and Element Connectivities

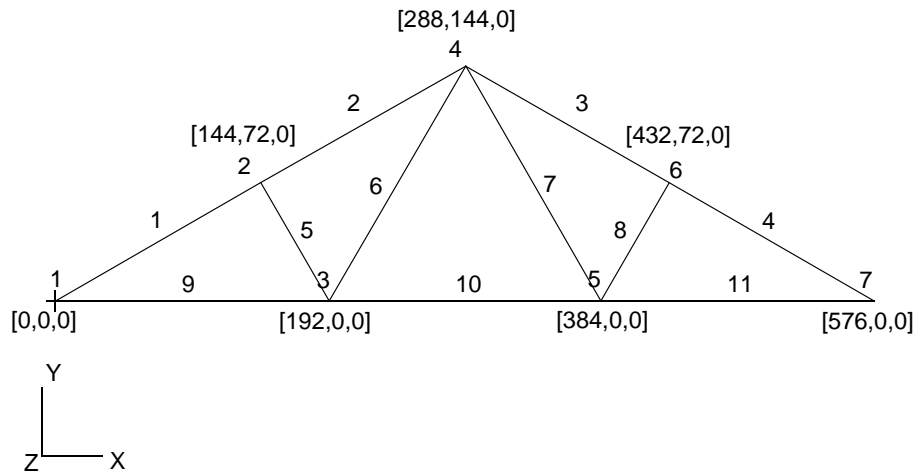

**Figure 2.2 - Loads and Boundary Conditions**

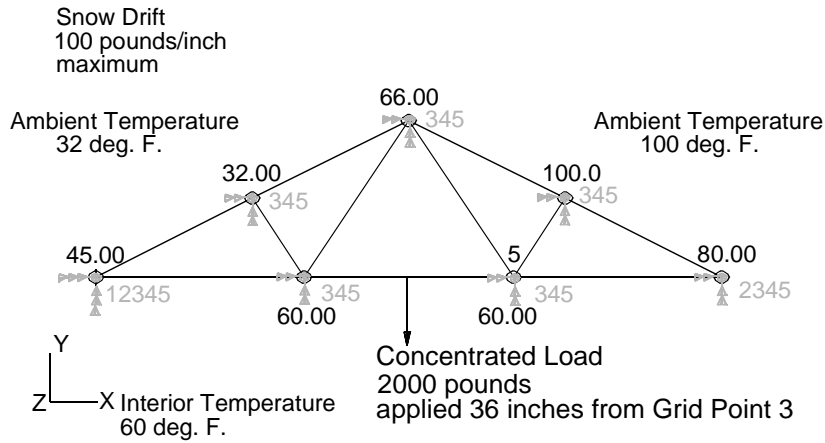


- Subcase One will be only the gravity load due to the weight of both the wood and steel members.
- Subcase Two will be the snow drift load and the concentrated load. The snow drift load is in the vertical direction and is given as a varying running load. The load increases linearly with distance along the beam, from 0 at Grid Point 4 to 100 lbs/in. at Grid Point 1.
- Subcase Three will be the temperature load which is calculated as the temperature averages and applied at the joints. The joint temperatures are supplied as problem data. The stress-free reference temperature is 72.0 degrees F.

**Table 2.1 - Description of Element Properties**

	<b>Material</b>	<b>Element Type and Cross-Section</b>
<b>Top members, elements 1, 2, 3, and 4</b>	<b>Steel</b>	<b>Beam, Cross Section B</b>
<b>Bottom members 9, 10 and 11</b>	<b>Steel</b>	<b>Beam, Cross Section A</b>
<b>Interior members 5, 6, 7, 8</b>	<b>Southern Pine</b>	<b>Rod, Area = 5.2 in<sup>2</sup></b>

**Table 2.2 - Material Properties**

<b>Material</b>	<b>Steel</b>	<b>Southern Pine</b>
<b>Elastic Modulus:</b>	<b>2.90E+07 psi</b>	<b>1.76E+06 psi</b>
<b>Poisson Ratio:</b>	<b>0.32</b>	
<b>Mass Density:</b>	<b>7.349E-04 lbm/in<sup>3</sup></b>	<b>5.435E-05 lbm/in<sup>3</sup></b>
<b>Coefficient of Thermal Expansion:</b>	<b>6.78E-06 in/deg. F</b>	<b>3.00E-06 in/deg. F</b>
<b>Reference Temperature:</b>	<b>72 deg. F</b>	<b>72 deg. F</b>
<b>Allowable Tension Stress:</b>	<b>24000 psi</b>	<b>1900 psi</b>
<b>Allowable Compression Stress:</b>	<b>24000 psi</b>	<b>1900 psi</b>
<b>Allowable Shear Stress:</b>	<b>24000 psi</b>	
<b>Gravitational Acceleration:</b>	<b>386.4 in/sec<sup>2</sup></b>	<b>386.4 in/sec<sup>2</sup></b>



**Table 2.3 - Beam Dimensions**

	<b>Cross Section A</b>	<b>Cross Section B</b>
<b>H</b>	<b>8.0 in.</b>	<b>6.0 in.</b>
<b>W1</b>	<b>3.0 in.</b>	<b>3.0 in.</b>
<b>W2</b>	<b>3.0 in.</b>	<b>3.0 in.</b>
<b>t</b>	<b>0.5 in.</b>	<b>0.5 in.</b>
<b>t1</b>	<b>0.5 in.</b>	<b>0.5 in.</b>
<b>t2</b>	<b>0.5 in.</b>	<b>0.5 in.</b>

**Table 2.4 - Temperature Distribution**

<b>Joint</b>	<b>Values</b>
<b>1</b>	<b>45 deg. F.</b>
<b>2</b>	<b>32 deg. F.</b>
<b>3</b>	<b>60 deg. F.</b>
<b>4</b>	<b>66 deg. F.</b>
<b>5</b>	<b>60 deg. F.</b>
<b>6</b>	<b>100 deg. F.</b>
<b>7</b>	<b>80 deg. F.</b>

## Suggested Exercise Steps:

- Generate a finite element representation of the truss structure using (GRID), (CROD), and (CBAR) elements.  
(**HINT:** Remember to use permanent constraints for DOF 345.)
- Define material (MAT1) and element (PROD) and (PBARL) properties.
- Apply simply-supported boundary constraints (SPC1), inertial loads (GRAV), a temperature load (TEMP), and a distributed load (PLOAD1).
- Use the load and boundary condition sets to define the load cases (SUBCASE).
- Prepare the model for a linear static analysis (SOL 101).
- Submit it for a linear static analysis.
- Review results.







**Exercise Procedure:**

1. Users who are not utilizing MSC.Patarn for generating an input file should proceed to Step 17, otherwise, continue with Step 2.

2. Create a new database called **prob2.db**.

**File/New...**

*New Database Name:*

**OK**

In the New Model Preferences form set the following:

*Tolerance:*  **Default**

*Analysis Code:*

*Analysis Type:*

**OK**

Select a preset view by selecting the **Front View** icon on the toolbar.



Activate the entity labels by selecting the **Show Labels** icon on the toolbar.



Whenever possible click  **Auto Execute** (turn off).

3. Create the nodes by manually defining their respective coordinates:

◆ **Finite Elements**

*Action:*

*Object:*

*Method:*

**Associate with Geometry**

---

*Node Location List:*

[0, 0, 0]

**Apply**

Repeat the previous operation to create the remaining nodes. Refer to the figure on page 2-3 for the nodal coordinates.

*Node Location List:*

[144, 72, 0]

**Apply**

*Node Location List:*

[192, 0, 0]

**Apply**

*Node Location List:*

[288, 144, 0]

**Apply**

*Node Location List:*

[384, 0, 0]

**Apply**

*Node Location List:*

[432, 72, 0]

**Apply**

*Node Location List:*

[576, 0, 0]

**Apply**

Next, manually define the truss segment connectivities with BAR2 elements using our newly created nodes. Again, refer to page 2-3 for connectivity information.

◆ **Finite Elements**

*Action:*

**Create**

*Object:*

**Element**

*Method:*

**Edit**

*Shape:*

**Bar**

*Topology:*

**Bar2**

*Node 1 =*

**Node 1**

*Node 2 =*

**Node 2**

**Apply**

Repeat the previous operation until all the truss segments have been created.

*Node 1 =*

**Node 2**

*Node 2 =*

**Node 4**

**Apply**

*Node 1 =*

**Node 4**

*Node 2 =*

**Node 6**

**Apply**

*Node 1 =*

**Node 6**

*Node 2 =*

**Node 7**

**Apply**

*Node 1 =*

**Node 2**

*Node 2 =*

**Node 3**

**Apply**

*Node 1 =*

**Node 3**

*Node 2 =*

**Node 4**

**Apply**

*Node 1 =*

**Node 4**

*Node 2 =*

**Node 5**

**Apply**

Node 1 =

Node 2 =

Node 1 =

Node 2 =


Node 1 =

Node 2 =

Node 1 =

Node 2 =

**Figure 2.3** - Nodal and Element Locations

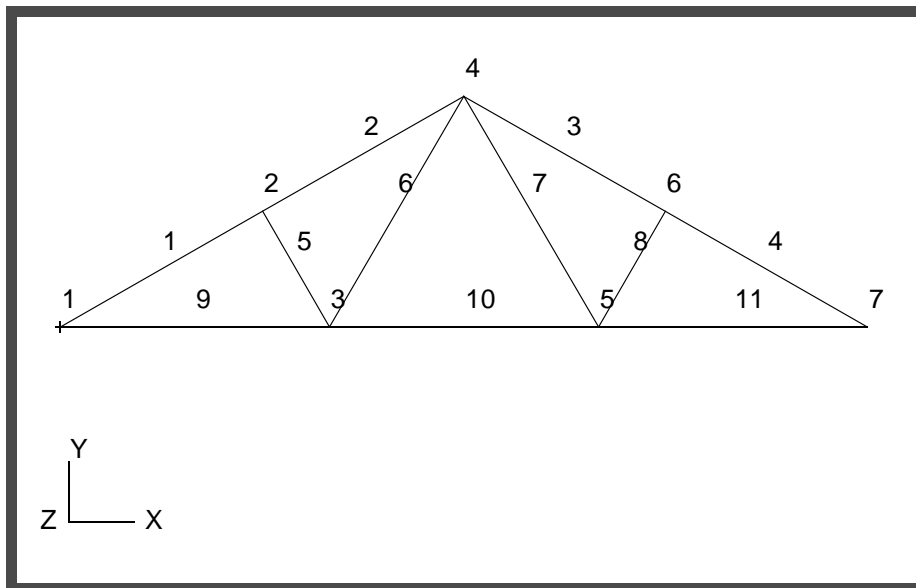

- Next, define a material using the specified modulus of elasticity and allowable stresses.

◆ **Materials**

<i>Action:</i>	<input type="text" value="Create"/>
<i>Object:</i>	<input type="text" value="Isotropic"/>
<i>Method:</i>	<input type="text" value="Manual Input"/>
<i>Material Name:</i>	<input type="text" value="southern_pine"/>

**Input Properties...**

<i>Constitutive Model:</i>	<input type="text" value="Linear Elastic"/>
<i>Elastic Modulus =</i>	<input type="text" value="1.76E6"/>
<i>Density =</i>	<input type="text" value="5.435E-5"/>
<i>Thermal Expan. Coeff =</i>	<input type="text" value="3.00E-6"/>
<i>Reference Temperature =</i>	<input type="text" value="72.0"/>

**Input Properties...**

<i>Constitutive Model:</i>	<input type="text" value="Failure"/>
<i>Tension Stress Limit =</i>	<input type="text" value="???"/> <small>(Enter material limit)</small>
<i>Compression Stress Limit =</i>	<input type="text" value="???"/> <small>(Enter material limit)</small>

5. Define another material for the model, steel.

◆ **Materials**

<i>Action:</i>	<input type="text" value="Create"/>
<i>Object:</i>	<input type="text" value="Isotropic"/>
<i>Method:</i>	<input type="text" value="Manual Input"/>
<i>Material Name:</i>	<input type="text" value="steel"/>

**Input Properties...**

<i>Constitutive Model:</i>	<input type="text" value="Linear Elastic"/>
<i>Elastic Modulus =</i>	<input type="text" value="2.90E7"/>
<i>Poisson Ratio =</i>	<input type="text" value="0.32"/>
<i>Density =</i>	<input type="text" value="7.349E-4"/>
<i>Thermal Expan. Coeff =</i>	<input type="text" value="6.78E-6"/>
<i>Reference Temperature =</i>	<input type="text" value="72.0"/>

<i>Constitutive Model:</i>	<input type="text" value="Failure"/>
<i>Tension Stress Limit =</i>	<input type="text" value="???"/> <i>(Enter material limit)</i>
<i>Compression Stress Limit =</i>	<input type="text" value="???"/> <i>(Enter material limit)</i>
<i>Shear Stress Limit =</i>	<input type="text" value="???"/> <i>(Enter material limit)</i>

6. Next, reference the material that was created in the previous step. Define the properties of the truss segments using the specified cross-sectional data.

◆ **Properties**

<i>Action:</i>	<input type="text" value="Create"/>
<i>Dimension:</i>	<input type="text" value="1D"/>
<i>Type:</i>	<input type="text" value="Rod"/>
<i>Property Set Name:</i>	<input type="text" value="rod"/>

<i>Material Name:</i>	<input type="text" value="m:southern_pine"/>
<i>Area:</i>	<input type="text" value="???"/> <i>(Enter cross-sectional area)</i>

OK

If you wish to use the mouse, click on the Select Members input box and click on the following icon from the Select Menu.



Select Members:

Elm 5:8

Add

Apply

- Enter the properties for the steel members using bar elements with the beam library.

◆ **Properties**

Action:

Create

Dimension:

1D

Type:

Beam

Property Set Name:

steel\_member\_a

Input Properties...

Material Name

m:steel

Bar Orientation

<0, 1, 0>

Click the beam library icon:



Action:

Create

Object:

Standard Shape

New Section Name:

section\_a

H

8

W1

3

W2	<input type="text" value="3"/>
t	<input type="text" value="0.5"/>
t1	<input type="text" value="0.5"/>
t2	<input type="text" value="0.5"/>

Select Members:

8. Repeat the procedure for the remaining sections of the truss.

◆ **Properties**

Action:

Dimension:

Type:

Property Set Name:

Material Name

Bar Orientation

Click the beam library icon:



Action:

Object:

<i>New Section Name:</i>	<input type="text" value="section_b"/>
<i>H</i>	<input type="text" value="6"/>
<i>W1</i>	<input type="text" value="3"/>
<i>W2</i>	<input type="text" value="3"/>
<i>t</i>	<input type="text" value="0.5"/>
<i>t1</i>	<input type="text" value="0.5"/>
<i>t2</i>	<input type="text" value="0.5"/>

<i>Select Members:</i>	<input type="text" value="Elm 1:4"/>
------------------------	--------------------------------------

9. Shrink the elements by 10% for clarity; this allows us to easily assess the element connectivities. Use the **Display/Finite Elements...** option.

**Display/Finite Elements...**

<i>FEM Shrink:</i>	<input type="text" value="0.10"/>
<input type="button" value="Apply"/>	
<input type="button" value="Cancel"/>	

10. Create three nodal constraints and apply them to the analysis model. These boundary conditions represent the pinned support, the roller support, and the out of plane translation/rotations.

- 10a. The left-hand support is defined as follows:

◆ **Loads/BCs**

<i>Action:</i>	<input type="button" value="Create"/>
<i>Object:</i>	<input type="button" value="Displacement"/>

---

Type:

New Set Name:

**Input Data...**

Translations < T1 T2 T3 >

**OK**

**Select Application Region...**

Geometry Filter:  FEM

Select Nodes:

**Add**

**OK**

**Apply**

10b. The right-hand support is located at the opposite end of the truss.

◆ **Loads/BCs**

Action:

Object:

Type:

New Set Name:

**Input Data...**

Translations < T1 T2 T3 >

**OK**

**Select Application Region...**

Geometry Filter:  FEM

Select Nodes:

**Add**

**OK**

**Apply**

10c. The out of plane translations and out of plane rotations can be constrained as follows:

◆ Loads/BCs

Action:	Create
Object:	Displacement
Type:	Nodal
New Set Name:	out_of_plane

Input Data...

Translations < T1 T2 T3 >	< , , 0 >
Rotations < R1 R2 R3 >	< 0, 0, >

OK

Select Application Region...


Geometry Filter:	◆ FEM
Select Nodes:	Node 1:7

Add

OK

Apply

Figure 2.4 - Displacement Constraints

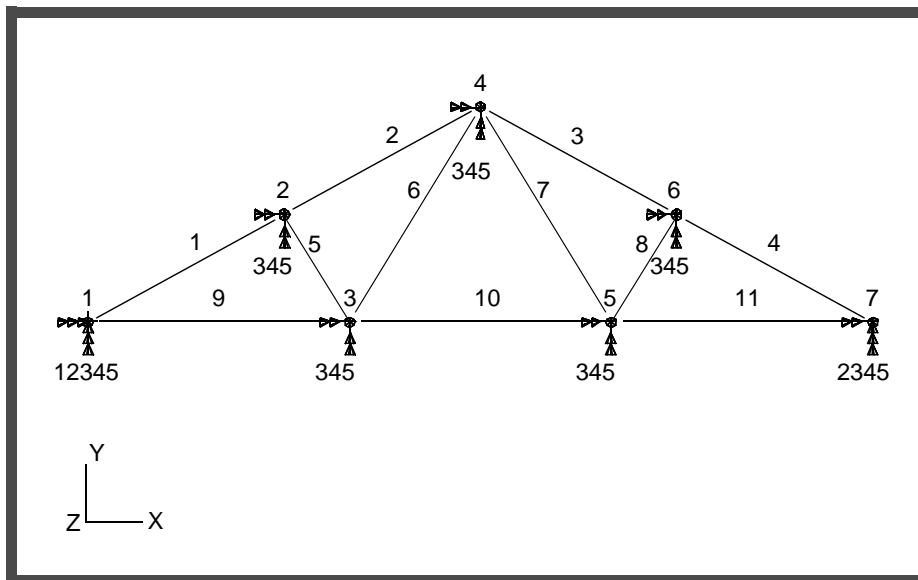

---

Reset the display by selecting the **Reset Graphics** icon on the **Top Menu Bar**.



**Reset Graphics**

11. Create the gravity load.

◆ **Loads/BCs**

*Action:*

**Create**

*Object:*

**Inertial Load**

*Type:*

**Element Uniform**

*New Set Name:*

**gravity\_load**

**Input Data...**

*Load/BC Set Scale Factor:*

**386.4**

*Trans Accel < A1 A2 A3 >*

**<0, -1, 0>**

**OK**

Since the gravity load acts uniformly on the body, the application region is automatically set as the entire model.

**Apply**

12. Next, define the temperature load using fields.

◆ **Fields**

*Action:*

**Create**

*Object:*

**Spatial**

*Method:*

**FEM**

*Field Name:*

**temp\_profile**

**Input Data...**

Enter the data into the table as shown below.

	<b>Entity</b>	<b>Values</b>
<b>1</b>	Node 1	45
<b>2</b>	Node 2	32
<b>3</b>	Node 3	60
<b>4</b>	Node 4	66
<b>5</b>	Node 5	60
<b>6</b>	Node 6	100
<b>7</b>	Node 7	80

**OK**

**Apply**

Deactivate the entity labels by selecting the **Hide Labels** icon on the toolbar.



**Hide Labels**

◆ **Loads/BCs**

*Action:*

**Create**

*Object:*

**Temperature**

*Type:*

**Nodal**

*New Set Name:*

**temperature\_load**

**Input Data...**

*Spatial Fields:*

**temp\_profile**

*(Click on this to select.)*

**OK**

**Select Application Region...**

*Geometry Filter:*

◆ **FEM**

*Select Nodes:*

**Node 1:7**


**Add**

OK

Apply

The model on your screen should now look similar to the following:

**Figure 2.5** - Temperature Loads

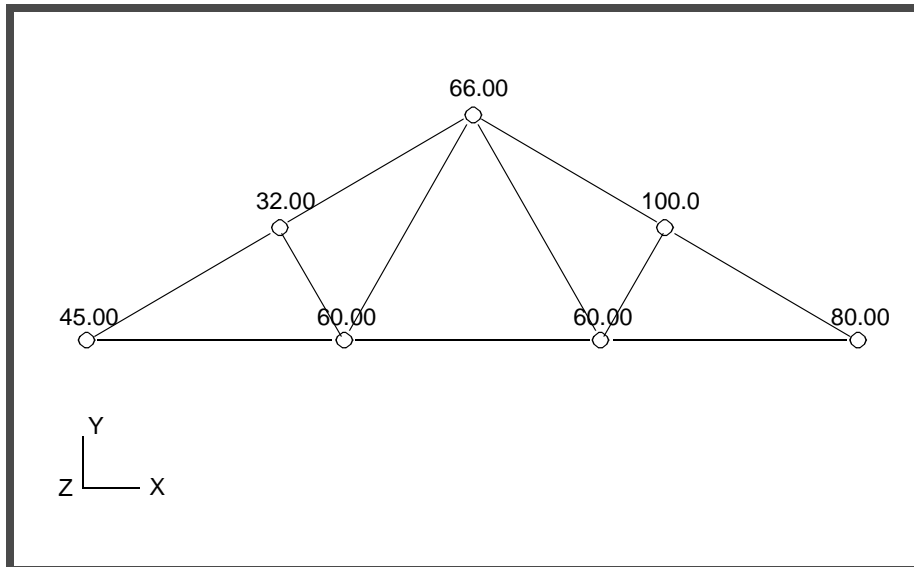

Reset the display by selecting the **Reset Graphics** icon on the **Top Menu Bar**.



**Reset Graphics**

13. Create a load case that references the inertial load and the boundary conditions that have already been defined.

◆ **Load Cases**

*Action:*

Create

*Load Case Name:*

gravity\_load

*Load Case Type:*

Static

Assign/Prioritize Loads/BCs

*Select Individual Load/BCs:  
(Select from menu)*

- Displ\_out\_of\_plane**
- Displ\_pin**
- Displ\_roller**
- Inert\_gravity\_load**

**NOTE:** Make sure that the LBC Scale Factor column shows the proper value for each entry (= 1.0).

**OK**

**Apply**

14. Create a second load case that references the temperature load, and the boundary conditions that have already been defined..

◆ **Load Cases**

*Action:*

**Create**

*Load Case Name:*

**temperature\_load**

*Load Case Type:*

**Static**

**Assign/Prioritize Loads/BCs**

**Remove All Rows**

*Select Individual Load/BCs:  
(Select from menu)*

- Displ\_out\_of\_plane**
- Displ\_pin**
- Displ\_roller**
- Tempe\_temperature\_load**

**OK**

**Apply**

**NOTE:** Make sure that the LBC Scale Factor column shows the proper value for each entry (= 1.0).

15. Now you are ready to generate an input file for analysis.

Click on the **Analysis** radio button on the **Top Menu Bar** and complete the entries as shown here.

◆ **Analysis**

*Action:*

**Analyze**

---

*Object:*

**Entire Model**

*Method:*

**Analysis Deck**

*Job Name:*

**prob2**

**Translation Parameters...**

*Data Output:*

**XDB and Print**

**OK**

**Solution Type...**

*Solution Type:*

◆ **Linear Static**

**Solution Parameters...**

■ **Database Run**

■ **Automatic Constraints**

*Data Deck Echo:*

**Sorted**

**OK**

**OK**

**Subcase Create...**

*Available Subcase:*

**gravity\_load**

*(Click on these to select)*

**Output Requests...**

*Select Result Type:*

**Element Forces**

**OK**

**Apply**

*Available Subcase:*

**temperature\_load**

*(Click on these to select)*

**Output Requests...**

*Select Result Type:*

**Element Forces**

**OK**

**Apply**

**Cancel**

**Subcase Select...**

Subcases For Solution Sequence:

**gravity\_load**  
**temperature\_load**

(Click on these to select)

Subcases Selected:

**Default**

(Click on this to deselect)

**OK**

**Apply**

An MSC.Nastran input file called **prob2.bdf** will be generated. This process of translating your model into an input file is called the Forward Translation. The Forward Translation is complete when the Heartbeat turns green.

16. Modify prob2.bdf to include a third subcase for the snow-drift load.

Open the file **prob2.bdf** with a text editor. The text below defines a third subcase. Enter this text on the line before **BEGIN BULK**.

```

SUBCASE 3
$ Subcase name : snow_&_concentrated_load
SUBTITLE=snow_&_concentrated_load
spc = 2
load = 5
disp = all
spcforce = all
force = all
stress=all

```

This text describes the snow drift load for the third subcase, enter this text on the line before **ENDDATA**, which is at the very end of the file.

```

PLOAD1,5,1,FY,FRPR,0.0,-100.,1.0,-50.
PLOAD1,5,2,FY,FRPR,0.0,-50.,1.0,0.0
PLOAD1,5,10,FY,LE,36.,-2000.

```

---

## Generating an Input File for MSC.Nastran Users:

MSC.Nastran users can generate an input file using the data from the **Model Description** section at the beginning of the exercise. The result should be similar to the output below.

### 17. MSC.Nastran Input File: **prob2.dat**

```
ID SEMINAR,PROB2
TIME 5
SOL 101
CEND
TITLE = GARAGE ROOF FRAME
SUBTITLE = WOOD AND STEEL MEMBERS
  SPC = 20
  DISP = ALL
  FORCE = ALL
  STRESS = ALL
  SPCFORCE = ALL
SUBCASE 1
  LABEL = GRAVITY LOAD
  LOAD = 1
SUBCASE 2
  LABEL = TEMPERATURE LOAD
  TEMP(LOAD) = 2
SUBCASE 3
  LABEL = SNOW AND CONCENTRATED LOAD
  LOAD = 3
BEGIN BULK
PARAM,POST, 0
GRID,1,,0.0,0.0,0.0,,345
GRID,2,,144.0,72.0,0.0,,345
GRID,3,,192.0,0.0,0.0,,345
GRID,4,,288.0,144.0,0.0,,345
GRID,5,,384.0,0.0,0.0,,345
GRID,6,,432.0,72.0,0.0,,345
GRID,7,,576.0,0.0,0.0,,345
CBAR,1,200,1,2,0.,1.,0.
CBAR,2,200,2,4,0.,1.,0.
CBAR,3,200,4,6,0.,1.,0.
CBAR,4,200,6,7,0.,1.,0.
CBAR,9,300,1,3,0.,1.,0.
CBAR,10,300,3,5,0.,1.,0.
CBAR,11,300,5,7,0.,1.,0.
CROD,5,100,2,3
CROD,6,100,3,4
CROD,7,100,4,5
CROD,8,100,5,6
PROD,100,10,5.2
PBARL      200      20          I
           6.       3.       3.       .5       .5       .5
PBARL      300      20          I
           8.       3.       3.       .5       .5       .5
MAT1,10,1.76+6,,5.435-5,3.0-6,72.
,1900.,1900.
```

```
MAT1,20,2.9+7,,.32,7.349-4,6.78-6,72.  
  ,24000.,24000.,24000.  
GRAV,1,,386.4,0.0,-1.0,0.0  
PLOAD1,3,1,FY,FRPR,0.0,-100.,1.0,-50.  
PLOAD1,3,2,FY,FRPR,0.0,-50.,1.0,0.0  
PLOAD1,3,10,FY,LE,36.,-2000.  
TEMP,2,1,45.  
TEMP,2,2,32.  
TEMP,2,3,60.  
TEMP,2,4,66.  
TEMP,2,5,60.  
TEMP,2,6,100.  
TEMP,2,7,80.  
SPC,20,1,12,0.0  
SPC,20,7,2,0.0  
ENDDATA
```

## Submitting the Input File for Analysis:

18. Submit the input file to MSC.Nastran for analysis.
  - 18a. To submit the MSC.Patran **.bdf** file for analysis, find an available UNIX shell window. At the command prompt enter: **nastran prob2.bdf scr=yes**. Monitor the run using the UNIX **ps** command.
  - 18b. To submit the MSC.Nastran **.dat** file for analysis, find an available UNIX shell window. At the command prompt enter: **nastran prob2.dat scr=yes**. Monitor the run using the UNIX **ps** command.
19. When the run is completed, edit the **prob2.f06** file and search for the word **FATAL**. If no matches exist, search for the word **WARNING**. Determine whether existing **WARNING** messages indicate modeling errors.
  - 19a. While still editing **prob2.f06**, search for the word:

**D I S P L A C E** (spaces are necessary).

What are the components of the displacement vector for GRID 3 and 5 (translation only)?

Gravity Load Case	Temperature Load Case	Snow Drift Load Case
Grid 3	Grid 3	Grid 3
Disp. X = _____	Disp. X = _____	Disp. X = _____
Disp. Y = _____	Disp. Y = _____	Disp. Y = _____
Disp. Z = _____	Disp. Z = _____	Disp. Z = _____
Grid 5	Grid 5	Grid 5
Disp. X = _____	Disp. X = _____	Disp. X = _____
Disp. Y = _____	Disp. Y = _____	Disp. Y = _____
Disp. Z = _____	Disp. Z = _____	Disp. Z = _____

Search for the word:

**S I N G L E** (spaces are necessary).

What are the components of the reaction force at GRID 1 and GRID 7?

<b>Gravity Load Case</b>	<b>Temperature Load Case</b>	<b>Snow Drift Load Case</b>
GRID 1	GRID 1	GRID 1
T1 = _____	T1 = _____	T1 = _____
T2 = _____	T2 = _____	T2 = _____
T3 = _____	T3 = _____	T3 = _____
GRID 7	GRID 7	GRID 7
T1 = _____	T1 = _____	T1 = _____
T2 = _____	T2 = _____	T2 = _____
T3 = _____	T3 = _____	T3 = _____

Search for the word:

**FORCE DIST** (spaces are necessary).

What is the axial force in the BAR elements (CBAR) for each element case?

<b>Gravity Load Case</b>	<b>Temperature Load Case</b>	<b>Snow Drift Load Case</b>
Element 4	Element 4	Element 4
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____
Element 11	Element 11	Element 11
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____

What is the axial force in CROD elements 7 and 8?

<b>Gravity Load Case</b>	<b>Temperature Load Case</b>	<b>Snow Drift Load Case</b>
Element 7 _____	Element 7 _____	Element 7 _____

---

Element 8 \_\_\_\_\_ Element 8 \_\_\_\_\_ Element 8 \_\_\_\_\_

Search for the word:

**S T R E S S** (spaces are necessary).

What is the margin of safety for elements 6 and 11?

<b>Gravity Load Case</b>	<b>Temperature Load Case</b>	<b>Snow Drift Load Case</b>
Element 6	Element 6	Element 6
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____
Element 11	Element 11	Element 11
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____

What is the Axial Stress for all elements 6 and 11?

<b>Gravity Load Case</b>	<b>Temperature Load Case</b>	<b>Snow Drift Load Case</b>
Element 6	Element 6	Element 6
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____
Element 11	Element 11	Element 11
PCT 1.000 _____	PCT 1.000 _____	PCT 1.000 _____
PCT 0.000 _____	PCT 0.000 _____	PCT 0.000 _____

## Comparison of Results:

20. Compare the results obtained in the **.f06** file with the results on the next page.

**GRAVITY LOAD**

POINT ID.	TYPE	D I S P L A C E M E N T V E C T O R						
		T1	T2	T3	R1	R2	R3	
1	G	0.0	0.0	0.0	0.0	0.0	-1.810154E-04	
2	G	9.097225E-03	-2.192763E-02	0.0	0.0	0.0	-5.905244E-06	
3	G	1.497809E-03	-2.494602E-02	0.0	0.0	0.0	-6.952493E-05	
4	G	2.020590E-03	-1.119851E-02	0.0	0.0	0.0	-1.510895E-19	
5	G	2.543371E-03	-2.494602E-02	0.0	0.0	0.0	6.952493E-05	
6	G	-5.056045E-03	-2.192763E-02	0.0	0.0	0.0	5.905244E-06	
7	G	4.041180E-03	0.0	0.0	0.0	0.0	1.810154E-04	

**TEMPERATURE LOAD**

POINT ID.	TYPE	D I S P L A C E M E N T V E C T O R						
		T1	T2	T3	R1	R2	R3	
1	G	0.0	0.0	0.0	0.0	0.0	-1.640538E-04	
2	G	-2.911754E-02	-2.330577E-02	0.0	0.0	0.0	1.430237E-04	
3	G	-2.548194E-02	-1.314894E-02	0.0	0.0	0.0	1.492482E-04	
4	G	-7.371972E-02	9.976783E-03	0.0	0.0	0.0	3.720360E-04	
5	G	-4.109691E-02	3.371104E-02	0.0	0.0	0.0	9.121846E-05	
6	G	-4.592643E-02	3.897398E-02	0.0	0.0	0.0	6.057345E-06	
7	G	-4.358151E-02	0.0	0.0	0.0	0.0	-3.110594E-04	

**SNOW AND CONCENTRATED LOAD**

POINT ID.	TYPE	D I S P L A C E M E N T V E C T O R						
		T1	T2	T3	R1	R2	R3	
1	G	0.0	0.0	0.0	0.0	0.0	-5.570779E-03	
2	G	1.271998E-01	-2.928742E-01	0.0	0.0	0.0	2.406997E-03	
3	G	1.541444E-02	-2.935280E-01	0.0	0.0	0.0	7.510522E-05	
4	G	5.572549E-03	-7.900714E-02	0.0	0.0	0.0	1.498581E-03	
5	G	2.198621E-02	-7.672425E-02	0.0	0.0	0.0	1.233808E-03	
6	G	5.831808E-03	-6.193648E-02	0.0	0.0	0.0	-5.114951E-05	
7	G	2.857348E-02	0.0	0.0	0.0	0.0	2.269690E-04	

```

GRAVITY LOAD
POINT ID. TYPE FORCES OF SINGLE-POINT CONSTRAINT
1 G -2.728484E-12 1.062826E+03 0.0 0.0 0.0 R3
7 G 0.0 1.062826E+03 0.0 0.0 0.0 R3

TEMPERATURE LOAD
POINT ID. TYPE FORCES OF SINGLE-POINT CONSTRAINT
1 G 1.455192E-11 -4.263256E-13 0.0 0.0 0.0 R3
7 G 0.0 1.818989E-12 0.0 0.0 0.0 R3

SNOW AND CONCENTRATED LOAD
POINT ID. TYPE FORCES OF SINGLE-POINT CONSTRAINT
1 G 1.164999E-04 1.320833E+04 0.0 0.0 0.0 R3
7 G 0.0 3.191667E+03 0.0 0.0 0.0 R3
    
```

GRAVITY LOAD													
F O R C E D I S T R I B U T I O N I N B A R E L E M E N T S ( C B A R )													
ELEMENT ID.	STATION (PCT)	BEND-MOMENT				SHEAR FORCE				AXIAL FORCE			
		PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2
1	0.000	-7.167844E+02	0.0	-1.985941E+01	0.0	-1.985941E+01	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0
1	1.000	2.480519E+03	0.0	-1.985941E+01	0.0	-1.985941E+01	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0
2	0.000	2.480519E+03	0.0	3.044506E+01	0.0	3.044506E+01	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0
2	1.000	-2.421041E+03	0.0	3.044506E+01	0.0	3.044506E+01	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0
3	0.000	-2.421041E+03	0.0	-3.044506E+01	0.0	-3.044506E+01	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0
3	1.000	2.480519E+03	0.0	-3.044506E+01	0.0	-3.044506E+01	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0	-1.517089E+03	0.0
4	0.000	2.480519E+03	0.0	1.985941E+01	0.0	1.985941E+01	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0
4	1.000	-7.167843E+02	0.0	1.985941E+01	0.0	1.985941E+01	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0	-1.654005E+03	0.0
9	0.000	7.167844E+02	0.0	-2.451677E+00	0.0	-2.451677E+00	0.0	1.470505E+03	0.0	1.470505E+03	0.0	1.470505E+03	0.0
9	1.000	1.187506E+03	0.0	-2.451677E+00	0.0	-2.451677E+00	0.0	1.470505E+03	0.0	1.470505E+03	0.0	1.470505E+03	0.0
10	0.000	1.187506E+03	0.0	-2.842171E-14	0.0	-2.842171E-14	0.0	1.026502E+03	0.0	1.026502E+03	0.0	1.026502E+03	0.0
10	1.000	1.187506E+03	0.0	-2.842171E-14	0.0	-2.842171E-14	0.0	1.026502E+03	0.0	1.026502E+03	0.0	1.026502E+03	0.0
11	0.000	1.187506E+03	0.0	2.451677E+00	0.0	2.451677E+00	0.0	1.470505E+03	0.0	1.470505E+03	0.0	1.470505E+03	0.0
11	1.000	7.167844E+02	0.0	2.451677E+00	0.0	2.451677E+00	0.0	1.470505E+03	0.0	1.470505E+03	0.0	1.470505E+03	0.0

F O R C E S I N R O D E L E M E N T S ( C R O D )													
ELEMENT ID.	AXIAL FORCE	TORQUE	ELEMENT ID.	AXIAL FORCE	TORQUE								
						5	-1.802138E+02	0.0	6	6.202254E+02	0.0		
7	6.202254E+02	0.0	8	-1.802138E+02	0.0								

TEMPERATURE LOAD												
ELEMENT ID.	STATION (PCT)	BEND-MOMENT		SHEAR FORCE		AXIAL FORCE		TORQUE		ELEMENT ID.		TORQUE
		PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	
1	0.000	4.113555E+02	0.0	-1.410100E+01	0.0	1.001056E+02	0.0	0.0	0.0	0.0	0.0	0.0
1	1.000	2.681573E+03	0.0	-1.410100E+01	0.0	1.001056E+02	0.0	0.0	0.0	0.0	0.0	0.0
2	0.000	2.681573E+03	0.0	1.898485E+01	0.0	9.596985E+01	0.0	0.0	0.0	0.0	0.0	0.0
2	1.000	-3.749292E+02	0.0	1.898485E+01	0.0	9.596985E+01	0.0	0.0	0.0	0.0	0.0	0.0
3	0.000	-3.749293E+02	0.0	1.823842E+01	0.0	-1.149399E+02	0.0	0.0	0.0	0.0	0.0	0.0
3	1.000	-3.311259E+03	0.0	1.823842E+01	0.0	-1.149399E+02	0.0	0.0	0.0	0.0	0.0	0.0
4	0.000	-3.311259E+03	0.0	-2.129528E+01	0.0	-1.198816E+02	0.0	0.0	0.0	0.0	0.0	0.0
4	1.000	1.172143E+02	0.0	-2.129528E+01	0.0	-1.198816E+02	0.0	0.0	0.0	0.0	0.0	0.0
9	0.000	-4.113555E+02	0.0	-3.215626E+01	0.0	-9.584331E+01	0.0	0.0	0.0	0.0	0.0	0.0
9	1.000	5.762646E+03	0.0	-3.215626E+01	0.0	-9.584331E+01	0.0	0.0	0.0	0.0	0.0	0.0
10	0.000	5.762646E+03	0.0	6.518988E+01	0.0	6.045220E+00	0.0	0.0	0.0	0.0	0.0	0.0
10	1.000	-6.753811E+03	0.0	6.518988E+01	0.0	6.045220E+00	0.0	0.0	0.0	0.0	0.0	0.0
11	0.000	-6.753811E+03	0.0	-3.456561E+01	0.0	1.167489E+02	0.0	0.0	0.0	0.0	0.0	0.0
11	1.000	-1.172141E+02	0.0	-3.456561E+01	0.0	1.167489E+02	0.0	0.0	0.0	0.0	0.0	0.0

FORCES IN ROD ELEMENTS (C R O D)												
ELEMENT ID.	STATION (PCT)	BEND-MOMENT		SHEAR FORCE		AXIAL FORCE		TORQUE		ELEMENT ID.		TORQUE
		PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	PLANE 1	PLANE 2	
5	0.000	3.334333E+01	0.0	-1.503388E+02	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
7	0.000	1.597325E+02	0.0	-3.984136E+01	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

**SNOW AND CONCENTRATED LOAD**

ELEMENT ID.	STATION (PCT)	F O R C E D I S T R I B U T I O N I N B A R E L E M E N T S ( C B A R )					
		BEND-MOMENT		SHEAR FORCE			
		PLANE 1	PLANE 2	PLANE 1	PLANE 2	AXIAL FORCE	TORQUE
1	0.000	-1.098263E+05	0.0	-5.620021E+03	0.0	-1.972972E+04	0.0
1	1.000	-6.902036E+04	0.0	4.039792E+03	0.0	-1.489982E+04	0.0
2	0.000	-6.902037E+04	0.0	-2.410550E+03	0.0	-1.409352E+04	0.0
2	1.000	-2.652932E+04	0.0	8.093880E+02	0.0	-1.248356E+04	0.0
3	0.000	-2.652932E+04	0.0	-2.326103E+02	0.0	-7.333517E+03	0.0
3	1.000	1.092021E+04	0.0	-2.326103E+02	0.0	-7.333517E+03	0.0
4	0.000	1.092021E+04	0.0	1.182581E+02	0.0	-7.289658E+03	0.0
4	1.000	-8.118965E+03	0.0	1.182581E+02	0.0	-7.289658E+03	0.0
9	0.000	1.098263E+05	0.0	6.417671E+02	0.0	1.513345E+04	0.0
9	1.000	-1.339296E+04	0.0	6.417671E+02	0.0	1.513345E+04	0.0
10	0.000	-1.339295E+04	0.0	-1.562901E+03	0.0	6.451971E+03	0.0
10	1.000	-2.531606E+04	0.0	4.370995E+02	0.0	6.451971E+03	0.0
11	0.000	-2.531606E+04	0.0	-1.741408E+02	0.0	6.467182E+03	0.0
11	1.000	8.118966E+03	0.0	-1.741408E+02	0.0	6.467182E+03	0.0

ELEMENT ID.	F O R C E S I N R O D E L E M E N T S ( C R O D )	
	AXIAL FORCE	TORQUE
5	-6.500541E+03	0.0
7	3.810205E+02	0.0

ELEMENT ID.	F O R C E S I N R O D E L E M E N T S ( C R O D )	
	AXIAL FORCE	TORQUE
6	9.150221E+03	0.0
8	3.535989E+02	0.0

GRAVITY LOAD

ELEMENT ID.	STATION (PCT)		S T R E S S		D I S T R I B U T I O N		S X F		I N		B A R		E L E M E N T S		S - M A X		( C B A R )		
	SXC	SXD	SXE	SXF	SXG	SXH	SXI	SXJ	SXK	SXL	SXM	SXN	SXO	SXP	SXQ	SXR	SXS	SXT	
1	0.000	-7.691278E+01	-7.691278E+01	7.691278E+01	-7.691278E+01	7.691278E+01	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	6.3E+01
1	1.000	-2.661660E+02	2.661660E+02	2.661660E+02	-2.661660E+02	-2.661660E+02	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	4.1E+01
2	0.000	-2.661660E+02	2.661660E+02	2.661660E+02	-2.661660E+02	-2.661660E+02	-2.758343E+02	-9.668304E+00	-2.758343E+02	-9.668304E+00	-2.758343E+02	-9.668304E+00	-2.758343E+02	-9.668304E+00	-2.758343E+02	-9.668304E+00	-2.758343E+02	-9.668304E+00	4.3E+01
2	1.000	2.597838E+02	-2.597838E+02	-2.597838E+02	2.597838E+02	2.597838E+02	-2.758343E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	4.4E+01
3	0.000	2.597838E+02	-2.597838E+02	-2.597838E+02	2.597838E+02	2.597838E+02	-2.758343E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	-2.597838E+02	-1.605054E+01	4.3E+01
3	1.000	-2.661660E+02	2.661660E+02	2.661660E+02	-2.661660E+02	-2.661660E+02	-2.758343E+02	-9.668335E+00	-2.661660E+02	-9.668335E+00	-2.661660E+02	-9.668335E+00	-2.661660E+02	-9.668335E+00	-2.661660E+02	-9.668335E+00	-2.661660E+02	-9.668335E+00	4.3E+01
4	0.000	-2.661660E+02	2.661660E+02	2.661660E+02	-2.661660E+02	-2.661660E+02	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	-3.007281E+02	-3.456216E+01	4.1E+01
4	1.000	7.691277E+01	-7.691277E+01	-7.691277E+01	7.691277E+01	7.691277E+01	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	-3.007281E+02	-2.238154E+02	4.1E+01
9	0.000	-5.070840E+01	5.070840E+01	5.070840E+01	-5.070840E+01	-5.070840E+01	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	7.6E+01
9	1.000	-8.400930E+01	8.400930E+01	8.400930E+01	-8.400930E+01	-8.400930E+01	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	9.8E+01
10	0.000	-8.400930E+01	8.400930E+01	8.400930E+01	-8.400930E+01	-8.400930E+01	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	9.8E+01
10	1.000	-8.400930E+01	8.400930E+01	8.400930E+01	-8.400930E+01	-8.400930E+01	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	1.579233E+02	2.419326E+02	9.8E+01
11	0.000	-8.400930E+01	8.400930E+01	8.400930E+01	-8.400930E+01	-8.400930E+01	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	2.262316E+02	3.102409E+02	7.6E+01
11	1.000	-5.070840E+01	5.070840E+01	5.070840E+01	-5.070840E+01	-5.070840E+01	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	2.262316E+02	2.769400E+02	7.6E+01

ELEMENT ID.	S T R E S S		I N		R O D		E L E M E N T S		( C R O D )	
	AXIAL STRESS	SAFETY MARGIN	AXIAL STRESS	SAFETY MARGIN	AXIAL STRESS	SAFETY MARGIN	TORSIONAL STRESS	SAFETY MARGIN	TORSIONAL STRESS	SAFETY MARGIN
5	-3.465651E+01	5.4E+01	1.192741E+02	1.5E+01	6	1.192741E+02	1.5E+01	0.0	0.0	0.0
7	1.192741E+02	1.5E+01	-3.465651E+01	5.4E+01	8	-3.465651E+01	5.4E+01	0.0	0.0	0.0

TEMPERATURE LOAD

ELEMENT ID.	STATION (PCT)	STRESS SXD		DISTRIBUTION		SF		BAR ELEMENTS		(C B A R)		M.S.-T	
		AXIAL STRESS	SXD	SXD	SXF	AXIAL	S-MAX	S-MIN	S-MIN	M.S.-C	M.S.-C		
1	0.000	-4.413949E+01	4.413949E+01	4.413949E+01	-4.413949E+01	1.820101E+01	6.234050E+01	-2.593847E+01	3.8E+02	3.8E+02			
1	1.000	-2.877395E+02	2.877395E+02	2.877395E+02	-2.877395E+02	1.820101E+01	3.059406E+02	-2.695385E+02	7.7E+01	7.7E+01			
2	0.000	-2.877395E+02	2.877395E+02	2.877395E+02	-2.877395E+02	1.744906E+01	3.051886E+02	-2.702905E+02	7.8E+01	7.8E+01			
2	1.000	4.023085E+01	-4.023085E+01	4.023085E+01	-4.023085E+01	1.744906E+01	5.767992E+01	-2.278179E+01	4.2E+02	4.2E+02			
3	0.000	4.023086E+01	-4.023086E+01	4.023086E+01	-4.023086E+01	-2.089816E+01	1.933270E+01	-6.112902E+01	7.1E+01	7.1E+01			
3	1.000	3.553065E+02	-3.553065E+02	3.553065E+02	-3.553065E+02	-2.089816E+01	3.344083E+02	-3.762047E+02	6.3E+01	6.3E+01			
4	0.000	3.553065E+02	-3.553065E+02	3.553065E+02	-3.553065E+02	-2.179665E+01	3.335098E+02	-3.771031E+02	7.1E+01	7.1E+01			
4	1.000	-1.257740E+01	1.257740E+01	-1.257740E+01	1.257740E+01	-2.179665E+01	-9.219258E+00	-3.437405E+01	6.3E+01	6.3E+01			
9	0.000	2.910105E+01	-2.910105E+01	2.910105E+01	-2.910105E+01	-1.474512E+01	1.435593E+01	-4.384618E+01	6.0E+01	6.0E+01			
9	1.000	-4.076743E+02	4.076743E+02	4.076743E+02	-4.076743E+02	-1.474512E+01	3.929292E+02	-4.224194E+02	5.6E+01	5.6E+01			
10	0.000	-4.076743E+02	4.076743E+02	4.076743E+02	-4.076743E+02	9.300338E-01	4.086043E+02	-4.067443E+02	5.8E+01	5.8E+01			
10	1.000	4.777935E+02	-4.777935E+02	4.777935E+02	-4.777935E+02	9.300338E-01	4.787236E+02	-4.768635E+02	4.9E+01	4.9E+01			
11	0.000	4.777935E+02	-4.777935E+02	4.777935E+02	-4.777935E+02	1.796137E+01	4.957549E+02	-4.598322E+02	4.7E+01	4.7E+01			
11	1.000	8.292229E+00	-8.292229E+00	8.292229E+00	-8.292229E+00	1.796137E+01	2.625360E+01	9.669140E+00	5.1E+01	5.1E+01			

ELEMENT ID.	AXIAL STRESS		SAFETY MARGIN		TORSIONAL STRESS		SAFETY MARGIN		TORSIONAL STRESS		SAFETY MARGIN	
	AXIAL STRESS	SAFETY MARGIN	SAFETY MARGIN	SAFETY MARGIN	AXIAL STRESS	SAFETY MARGIN	SAFETY MARGIN	SAFETY MARGIN	TORSIONAL STRESS	SAFETY MARGIN	TORSIONAL STRESS	SAFETY MARGIN
5	6.412179E+00	3.0E+02	0.0	6	-2.891131E+01	6.5E+01	0.0	0.0	0.0	0.0	0.0	0.0
7	3.071780E+01	6.1E+01	0.0	8	-7.661800E+00	2.5E+02	0.0	0.0	0.0	0.0	0.0	0.0

SNOW AND CONCENTRATED LOAD

ELEMENT ID.	STATION (PCT)	STRESS		DISTRIBUTION		ELEMENTS		(C B A R)		M.S.-T
		SXC	SXD	SXE	SXF	AXIAL	S-MAX	S-MIN	M.S.-C	
1	0.000	1.178464E+04	-1.178464E+04	1.178464E+04	1.178464E+04	-3.587222E+03	8.197420E+03	-1.537187E+04	5.6E-01	
1	1.000	7.406060E+03	-7.406060E+03	7.406060E+03	7.406060E+03	-2.709058E+03	4.697002E+03	-1.011512E+04	1.4E+00	
2	0.000	7.406061E+03	-7.406061E+03	7.406061E+03	7.406061E+03	-2.562459E+03	4.843602E+03	-9.968520E+03	1.4E+00	
2	1.000	2.846663E+03	-2.846663E+03	2.846663E+03	2.846663E+03	-2.269737E+03	5.769253E+02	-5.116400E+03	3.7E+00	
3	0.000	2.846663E+03	-2.846663E+03	2.846663E+03	2.846663E+03	-1.333367E+03	1.513296E+03	-4.180030E+03	1.5E+01	
3	1.000	-1.171767E+03	1.171767E+03	-1.171767E+03	-1.171767E+03	1.333367E+03	-1.616001E+02	-2.505133E+03	4.7E+00	
4	0.000	-1.171767E+03	1.171767E+03	-1.171767E+03	-1.171767E+03	1.325392E+03	-1.536259E+02	-2.497159E+03		
4	1.000	8.711855E+02	-8.711855E+02	8.711855E+02	8.711855E+02	-1.325392E+03	-4.542069E+02	-2.196578E+03	8.6E+00	
9	0.000	-7.769585E+03	7.769585E+03	-7.769585E+03	-7.769585E+03	2.328223E+03	1.009781E+04	-5.441362E+03	1.4E+00	
9	1.000	9.474753E+02	-9.474753E+02	9.474753E+02	9.474753E+02	-2.328223E+03	3.275699E+03	1.380748E+03	3.4E+00	
10	0.000	9.474749E+02	-9.474749E+02	9.474749E+02	9.474749E+02	9.926110E+02	1.940086E+03	4.513605E+01	1.1E+01	
10	1.000	1.790967E+03	-1.790967E+03	1.790967E+03	1.790967E+03	9.926110E+02	2.783578E+03	-7.983358E+02	7.6E+00	
11	0.000	1.790967E+03	-1.790967E+03	1.790967E+03	1.790967E+03	9.949510E+02	2.785918E+03	-7.960159E+02	7.6E+00	
11	1.000	-5.743705E+02	5.743705E+02	-5.743705E+02	-5.743705E+02	9.949510E+02	1.569322E+03	4.205806E+02	2.9E+01	

ELEMENT ID.	AXIAL STRESS		TORSIONAL STRESS		SAFETY MARGIN		AXIAL STRESS		TORSIONAL STRESS		SAFETY MARGIN	
	SXC	SXD	SXE	SXF	SXC	SXD	SXE	SXF	SXC	SXD	SXE	SXF
5	-1.250104E+03	5.2E-01	0.0	0.0	6	1.759658E+03	8.0E-02	0.0	0.0			
7	7.327319E+01	2.5E+01	0.0	0.0	8	6.799979E+01	2.7E+01	0.0	0.0			

---

**21. MSC.Nastran Users have finished this exercise. MSC.Patran Users should proceed to the next step.**

22. Proceed with the Reverse Translation process, that is, attaching the **prob2.xdb** results file into MSC.Patran. To do this, return to the **Analysis** form and proceed as follows:

◆ **Analysis**

<i>Action:</i>	<b>Attach XDB</b>
<i>Object:</i>	<b>Result Entities</b>
<i>Method:</i>	<b>Local</b>

<b>Select Results File...</b>	
<b>Filter</b>	
<i>Available Files:</i>	<b>prob2.xdb</b>
<b>OK</b>	
<b>Apply</b>	

23. When the translation is complete and the Heartbeat turns green, bring up the **Results** form.

◆ **Results**

<i>Action:</i>	<b>Create</b>
<i>Object:</i>	<b>Fringe</b>
<i>Select Results Case(s):</i>	<b>temperature_load, Static Subcase</b>
<i>Select Fringe Result:</i>	<b>Displacements, Translational</b>
<i>Quantity:</i>	<b>Magnitude</b>

To change the target entities of the plot, click on the **Target Entities** icon.



**Target Entities**

<i>Target Entity:</i>	<b>Materials</b>
<i>Select Materials:</i>	<b>southern_pine</b>

To change the display attributes of the plot, click on the **Display Attributes** icon.



**Display Attributes**

*Style:*

**Discrete/Smooth**

To change the plot options, click on the **Plot Options** icon.



**Plot Options**

*Coordinate Transformation:*

**None**

**Apply**

24. Next, add the deformation options to the plot.

◆ **Results**

*Action:*

**Create**

*Object:*

**Deformation**

*Select Results Case(s):*

**temperature\_load, Static Subcase**

*Select Deformation Result:*

**Displacements, Translational**

To change the properties of the plot, click on the **Display Attributes** icon.



**Display Attributes**

■ **Show Undeformed**

*Line Style:*

**- - - - -**

**Apply**

If you wish to reset your display graphics to the state it was in before you began post-processing your model, remember to select the **Reset Graphics** icon.



**Reset Graphics**

---

You can go back and select any *Results Case*, *Fringe Results* or *Deformation Results* you are interested in.

Quit MSC.Patran when you have completed this exercise.